



STEREO LEFT /RIGHT SINGLE SUB 1 x ART705AS SUB & 2 x ART312/22/25a ETC

ART3XX A (ACTIVE)

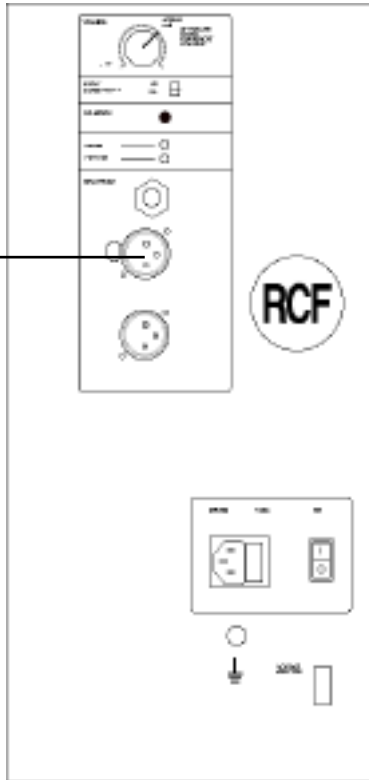

Connect LEFT & RIGHT output of mixer to combo jack / XLR input socket on sub (ART705AS)
 Connect balanced XOVER output on sub to input on ART 3XX a speaker.
 LEFT to left, RIGHT to right
 Set sub XOVER to 120Hz.
 Experiment with PHASE switch and leave set for best response (in most cases this will be at 0°)
 Used with subs, the ART3XXa should be set for flat response with the input sensitivity set to LINE.
 Start with sub and mid /top cab level control set to 0dB and adjust system balance as required.


ART3XX A (ACTIVE)

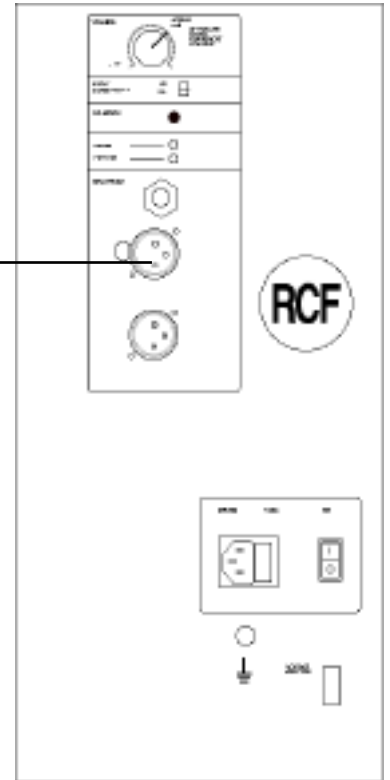

CROSSED OVER
 SIGNAL TO MID TOP
 ACTIVE SPEAKER LEFT

CROSSED OVER
 SIGNAL TO MID TOP
 ACTIVE SPEAKER RIGHT

ART705AS

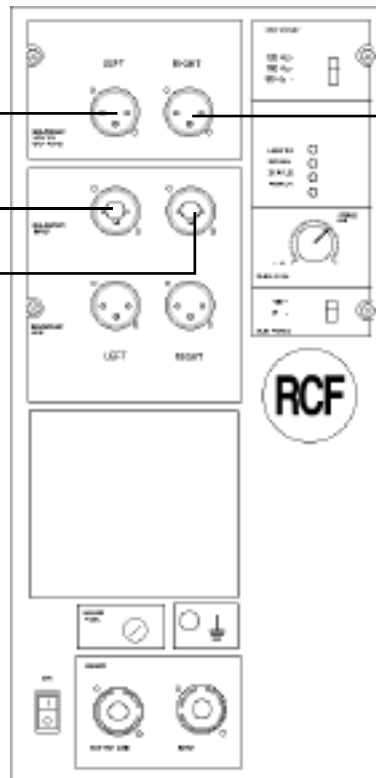

FROM MIXER LEFT

FROM MIXER RIGHT